Outlook® 200 Safety Infusion System

Going Beyond the Standard Limits




Easy-to-use device helps ensure safe IV medication delivery.





Bedside Barcode Verification Helps Ensure Everything is Right

- Promotes safer administration practices by reducing manual programming steps using barcoding with patient matching
- Promotes integrated safety by assigning dose limits to scanned drugs
- Promotes easy titration by prompting for the starting dose on "titrate" orders
- Visually indicates dose selection with DoseGuard[™] software



The Proper Balance of Safety and Ease of Use

- Easy to learn
 - Manual operation RATE, VOLUME, RUN
 - Automatic Dose Rate Calculator
 - Large, highly visible keys
- Reduce nuisance air-in-line alarms with air-trapping cassette
- Stackable modular design reduces bedside cord clutter and errors due to channel confusion
- Comprehensive line of needle-free administration sets include UV light resistant tubing that protects therapy efficacy

"For me barcoding not only expedites an infusion but gives me peace of mind."

1 RIGHT CLINICIAN



POWER

IGGYBACK

Rate

Scan clinician's ID to verify authorized user.

4 RIGHT INFORMATION




Verify the right information is displayed. Press RUN.

B. Sure.

Safety in four simple steps

Easy to follow steps and DoseScan[™] software technology help ensure the right patient receives the right medication and the right dose.

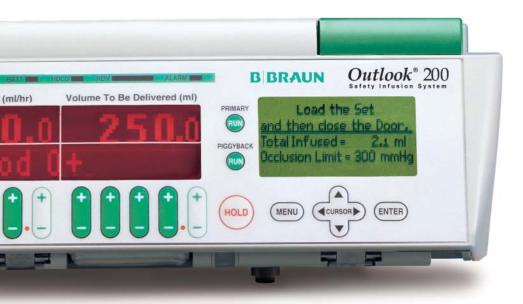

2 RIGHT PATIENT




Scan patient's wristband ID and IV medication or blood container to verify the right patient is matched to the prescribed therapy.

3 RIGHT MEDICATION AND DOSE



Scan IV label to automatically program pump with IV therapy.

"I know that we are complying with proposed rules, now that we have a simple to use system driven by barcoding."

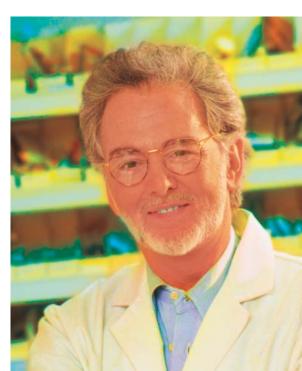


Outlook® 200 Safety Infusion System

SPECIFICATIONS

Mechanism:	Volumetric, Positive Pressure Displacement Reservoir
Width:	30.5 cm (12 in)
Height:	11.4 cm (4.5 in)
Depth:	22.2 cm (8.75 in)
Weight:	5 kg (11 lbs)
Power:	120 VAC, 3A, 60 Hz USA excluding accessories
Grounding Resistance:	Meets UL Standard 2601-1
Leakage current:	Meets or Exceeds UL Standard 2601-1
Battery:	12 V sealed lead-acid battery
Battery Operating Time:	3 hours at 125 mL/hr
Rate Range:	0.1 to 999.9 mL/hr in 0.1 mL increments Micro Mode: 0.1 to 99.9 mL/hr in 0.1 mL increments
Volume to be Infused Range:	0.1 to 9999.9 mL in 0.1 mL increments
Variable Occlusion Pressure:	75, 100, 200, 300, 400, 500, and 750 mmHg
KVO Rate:	3 mL/hr or selected rate whichever is lower
Volumetric Accuracy:	± 5%
Alarms:	Air-in-Line, Bag Empty, Door Open, Downstream Occlusion, Hold time Exceeded, Low Battery, Plug-in, System Error, Upstream Occlusion, Check Set, DoseGuard [™] Alert
Memory:	Permanent data retention after the pump is turned off unless alternative Data Retention Defaults have been selected in the Biomed Options
Tubing:	Horizon® Pump Sets
Modes/Features:	DoseScan [™] , Dose Mode with Drug Menu and DoseGuard [™] dose limits, Primary and Piggyback Modes, Set Time and Volume, Schedule Next Run, Profile Mode for TPN, Program Mode, q(x) Mode, Site Trend, Variable Occlusion Pressure, Micro Mode, Epidural Mode
Laser:	Class 2 Per IEC 60825-1*

*Applies to laser barcode scanner.



Promote Safe IV Medication Delivery.

Preventing medication errors begins with confirming the right patient with the right drug and the right dose along with the right route, the right time, and the right clinician.



Extend your Outlook on Safety.

Schedule a consultation with a B. Braun Infusion Specialist by calling 1-800-227-2862.



www.bbraunusa.com